

Skirting Rubber



SKIRTING RUBBER






Features of Dual Seal Skirt Board:

1.Double-layer structure, better containment and sealing.

2. Abrasion-resistant polyurethane parts provide longer lasting performance.



Double-lips structure, better sealing.

Cast polyurethane, higher wear resistance than rubber.

High productivity, better prices.

Double-layer structure, with heat retaining inside and dust-proof outside.

The parts where contact the belt is made of polyurethane, which have longer service life and no damage to the belt.

Clamp units are easy to install, adjust and maintain.








Dual seal poly skirting is a combination of polyurethane skirt and dual seal rubber skirt. It combines the good wear resistance of poly skirt and the double layer structure of dual seal rubber skirt. This means longer service life and better sealing effect.

Description	Unit	Value	
Color		Red, orange,black,green or custom-made color.	
Hardness;Shore A	Shore A	63±5, 70±5	
Density	g/cm³	1. 25	
Tensile	MPa	40	
Elongation at break	%	660	
Abrasion Loss	mm³@10N	40	
Angle Tear Strength(DIE C)	kN/m	57	
Trouser Tear Strength(DIE C)	kN/m	23	
Temperature Range	°C	-30~70	
Rebound	%	43	

SKIRTING RUBBER ENQUIRY FORM

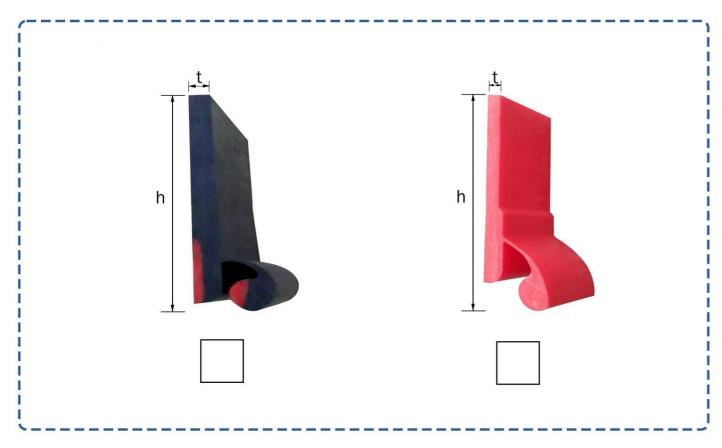

Email:	Tel:	Customer ID:
Add:		Delivery time:
Website:		Job number:

Туре	h	t





ATG Australasia supplies high-quality components, assemblies, and sub-assemblies to manufacturers across a wide range of industries, including agriculture, mining, crushing & screening, construction, waste recycling, and material processing. Our reliable solutions help drive efficiency, durability, and performance in your operations.

With our UK headquarters and sales & technical offices in the USA, Australia, China, India, and Turkey, we deliver a complete project solution. As your strategic partner, we provide expert support, global reach, and seamless integration to drive your success.



Contact details:

t: +61 (0) 483 382 700 w: atg-australasia.com e: mrobinson@atg-global.com